




Control your heating **anytime, anywhere**, with Rointe Connect – the smart app for our WiFi connected heating range.


Designed for easy operation by any type of user, Rointe Connect is easy to download, install and use.

If you need help you can **watch our Rointe Connect app videos** here:




You are just **4 steps** away from controlling your heating anywhere, anytime. Once you have installed and connected your D Series product, you then need to pair it:

 **Let's start**

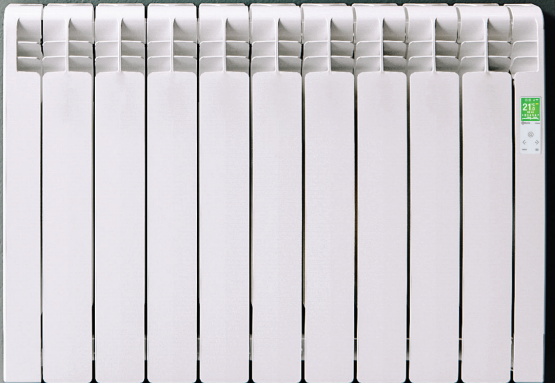A white Rointe D Series radiator is shown against a dark green wall. To the left, a modern chair is partially visible.

Install. Pair. Go.

Three white icons are arranged horizontally: a radiator, a ladder, and a smartphone.

Learn how to pair your D Series products easily with the Rointe Connect app at:
rointe.com/uk/d-series-pairing/

Need help? Contact us:
call 0203 321 5929
email support@rointe.co.uk

Mobile phone not included. The images shown are for illustrative purposes only. GRC20V1-UK




D Series

Quick setup and product pairing guide

RointeCONNECT

A smartphone displaying the Rointe Connect app interface for a living room. The screen shows a large circular temperature dial set to 21.5°C, with a 'MAN' mode indicator and a 17.5 m² area. Below the dial are icons for power, fan, leaf, and sun (Comfort). At the bottom, there are four buttons for different radiators: RAD 01938492 (21°C), RAD 23874236 (24°C), RAD 01938492 (17°C), and a 'NEW PRODUCT' button with a plus sign.

1 Download the Rointe Connect app

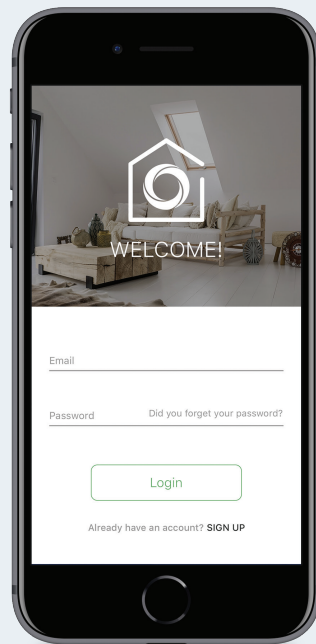

Download and install the free Rointe Connect app from the store on your smartphone or tablet. Available at Google Play for Android* and the App Store for iOS**.

Rointe Connect is also available online at www.rointeconnect.com

Once you have installed the app, complete the **E-life Technology registration** by entering your details, a valid email and password.



* Android 5.0 or higher. ** iOS 11.0 or higher.


2 Create your installation & add zones

Log into the Rointe Connect App with your **email and password**.

On the main screen you must press the (+) button to create an installation. Now, follow the **installation setup wizard**.

Enter a name, select your location by pressing and holding down on the blue dot which represents your current location, select your time zone (GMT) and personalize by selecting a colour and an icon.

After this, **add as many zones as you wish**, differentiating between zones that contain other zones or products. A zone with a product is known as a final zone.

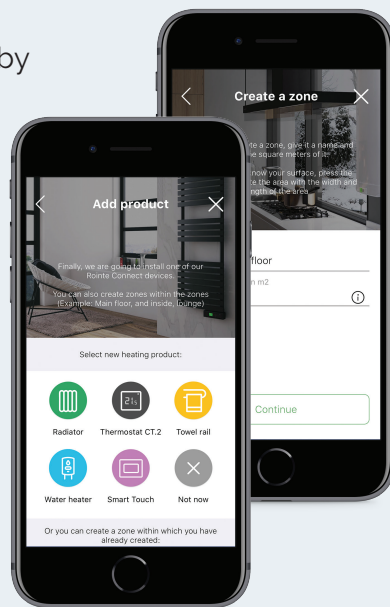


3 Pair your product

On the Rointe App, select the final zone in which you would like to pair the product (for example: living room). Press the menu button (••• on iOS, ☰ on Android) and select the option **"Add product"**.

Press the menu button (☰) on the keypad of your product. On the menu screen, using the (←) and (→) buttons to navigate and (⏻) to enter, access the configuration sub-menu (⚙️) and select the Wi-Fi option (📶).

The screen of your product will change to red, showing a picture like the one below. This means that you have **successfully activated** the pairing mode.


Your product will create a Wi-Fi network that you will connect to use the access information shown on the screen.




4 Pair your products with the app

Make sure that you are connected to the Wi-Fi network that you want to connect your product to and continue with the pairing guide, entering your Wi-Fi password when asked.

Next:

 **On iOS**, in the phone settings, connect to the Wi-Fi network that your product has created (**NET:**) entering the password (**PIN:**). Go back onto the Rointe App and confirm that you are connected to your product.

 **On Android**, select your products Wi-Fi network (**NET:**) and it will automatically connect to the product.

If this process has been done correctly, your product will restart and the colour of the screen will turn green (by default). Select **"Check configuration"** to finalise.

Your D Series is now configured!

